


Wires wrapped in protective sleeve. Ends of protective sleeve are secured by heat shrink tubing.

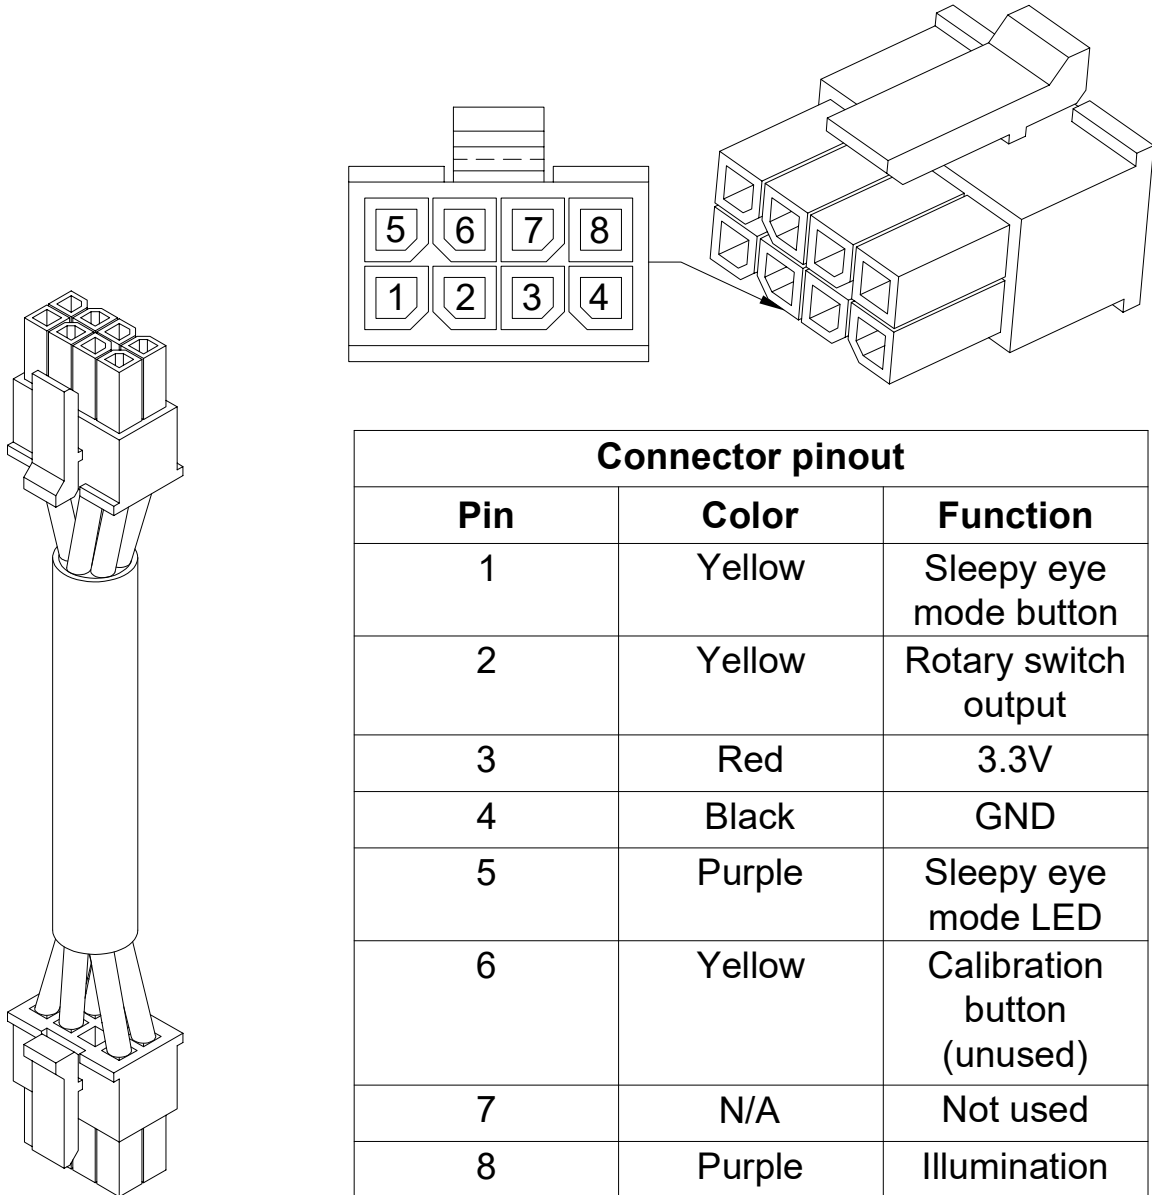

Connector pinout		
Pin	Color	Function
1	Yellow	Sleepy eye mode button
2	Yellow	Rotary switch output
3	Red	3.3V
4	Black	GND
5	Purple	Sleepy eye mode LED
6	Yellow	Calibration button (unused)
7	N/A	Not used
8	Purple	Illumination LEDs

Dept.	Technical reference	Created by <b>Sheep</b>	3/14/2026	Approved by	
		Document type <b>Component drawing</b>	Document status <b>Approved</b>		
		Title <b>Sleepy eye controls cable</b>	DWG No. <b>10322</b>		
		Rev. <b>A</b>	Date of issue <b>3/14/2026</b>	Sheet <b>1/1</b>	